



**NOTE #1:**  
The standard power supply in the GFC-ADA-MCSH-KIT has a maximum output of 1.0A @ 24VDC, do not exceed these capabilities. Larger power supplies are available.

**NOTE #2:**  
Maximum wire length between the power supply and the signals should not exceed 300ft without a voltage drop calculation.

**NOTE #3:**  
Terminals are rated for 16 gauge wire, use 18 gauge 2 conductor non-shielded fire alarm wire.

**NOTE #4:**  
GFC warranty is 5 years from th date of purchase, against manufacturer defects, this does not cover labor.

**NOTE #5:**  
You should always check with your AHJ for approval.

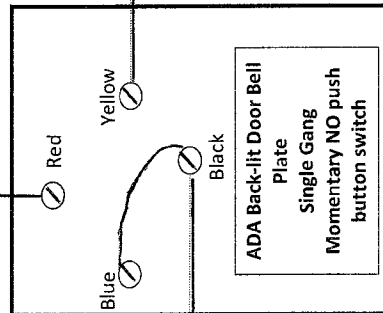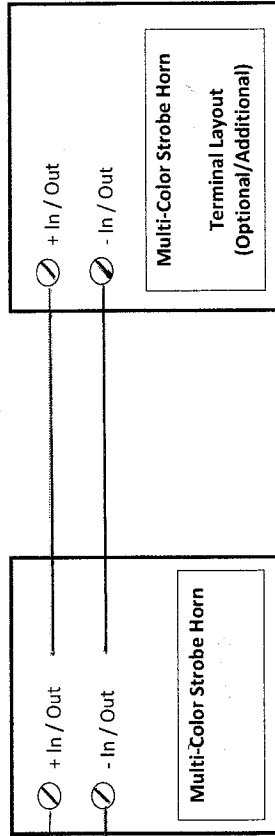

**Hear World Communications**  
21004 Brooke Knolls Rd.  
Laytonsville, MD 20882  
www.hearworldusa.com

<b>SW1 = STROBE COLOR</b>	<b>SW2 = SOUND OUTPUT</b>
0 = OFF	0 = OFF
1 = AMBER/YELLOW	1 = CHIME CONTINUOUS
2 = CLEAR/WHITE	2 = CHIME TEMPORAL
3 = GREEN	3 = HORN CONTINUOUS
4 = BLUE	4 = HORN TEMPORAL
5 = RED	5 = DOOR BELL / DING DONG

Meets ANS/UL 464, ANS/UL 1971, and UL 1638  
Assembled in the USA  
5 year warranty from date of purchase