



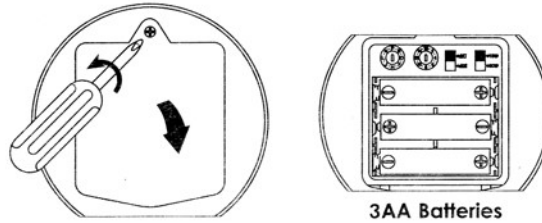


# Wireless Flasher Suits for VP

## User Guide

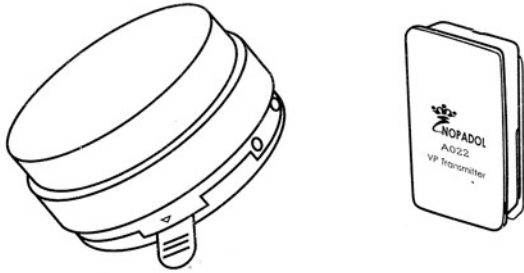

3AA Batteries

Remove the battery cover after unscrew battery cover screw with screwdriver, Install three AA Batteries in it According to the direction of graphic, Toggle the choose time switch, Select the LED brightness.

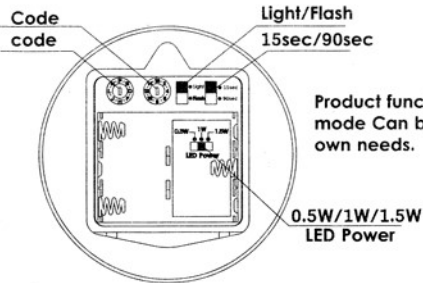

Product function flexible Settings, Working mode Can be adjusted according to your own needs.

0.5W/1W/1.5W LED Power



Product has a independent switch button, Press the button can be directly used as a flashlight. When the received signal lighting or flashing, Press the button to turn off led directly, Easy to use.  
Products has a DC 5 V power supply socket, Can use three AA batteries Supply of electricity, may also bring a plug adapter power supply directly. Note: This product does not include the adapter, need to buy separately.

- Product has elegant appearance, suitable for all kinds of style, demonstrate fashion sense.
- Adopt three AA batteries or DC5V power supply, simple and convenient installation, note: this product is not included DC power supply.
- Product uses the high quality led lights, high luminance, energy-saving, environmental protection and long life.
- Made of high quality PC material and grinding technology production of pervious to light cover, and add fluorescent powder, is more bright and soft light.
- Products work mode can choose bright lights or flash, light time can choose 15 seconds or 90 seconds, brightness can choose 0.5 W, 1 W, 1.5 W, it is Powerful, meet your different needs, use rise more humane.

## Wireless Flasher Receiver

200m wireless remote control led lights




Please read the user guide carefully before using this product

315MHZ Model:A02




the tray button

As shown in the above direction to press the tray button remove flasher receiver body.



The Hanging wall tray can use double-sided adhesive or screw installed in the metope of smooth surface or cabinets lining, And also can be used flat on the table, More humane.

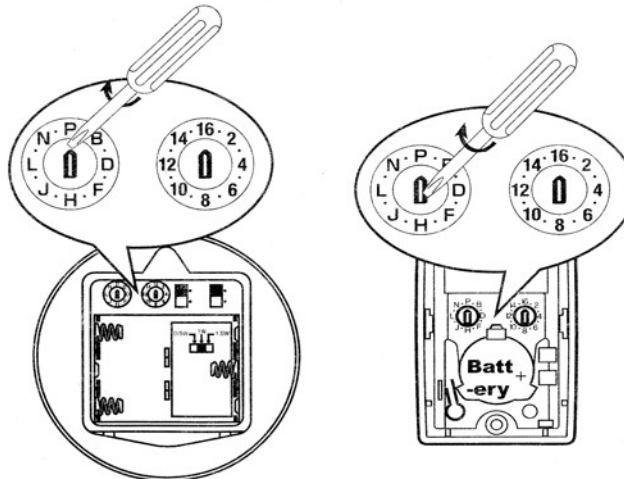

A transmitter and a receiver Coding turntable keep to work in the same direction, For example, transmitter turntable for "P" and "16", Receiver turntable for "P" and "16", too, If you find a neighbor's use with the same product, you can choose another code to prevent interference. Working mode can choose light or flash, Time can be set for 15 sec or 90 sec.

- 200 m wireless remote control distance to use handy, note: remote control distance refers to the open field.
- 256 codes are optional, double turntable, can be used free combination, without any limitation, Easy to implement one transmitter supporting multiple receiver or multiple transmitter supporting one receiver.
- Independent hanging design, easy to take out the main body, don't have to worry about replacing batteries.
- Product can be hung, can paste, can put, follow one's inclinations, placed in any place you can imagine.

### Product parameters

- Power : DC4.5 v ● Battery life, three to six months, calculated at 10 times a day ● Material: plastic
- Power: no more than 1.5w ● Number of leds: three
- Led lighting power: 0.5w, 1w, 1.5w can choose
- Led lighting conditions: receive wireless trigger signal ● product quality: 150 grams
- Led light time: can choose 15 seconds or 90 seconds ● use scope: indoor
- Led lights light time error: plus or minus 5 seconds
- Temperature range of use: -20 C to +55 C
- Product size: 105 x 118 x 60mm