

#### USER MANUAL DCX-25

### **PARTS & FUNCTION**

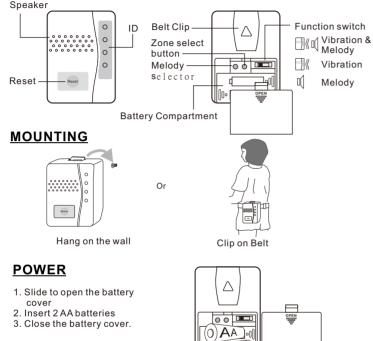



Using 2 x AA size Battery

# **FCC Statement:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: Modifications to this product will void the user's authority to operate this equipment.

## **CODE MATCHING & TUNE SELECTION**

- Step 1: Insert batteries to the transmitter to be used e g door bell
- Step 2: Insert batteries to the receiver to be used
- (chime unit). Step 3: Enter pairing mode for receiver (pager unit). Press and hold the zone select button 
  for 3 seconds. The LED #1 will flash



Press ) melody selector to scroll through the melodies. Once you hear your preferred melody, do not press again as it is now selected.



• NO

Step 5: Once the zone and melody are selected with the zone icon flashing. trigger the transmitter once to pair. If successful, the receiver (pager) will generate a short tone. Press the 
button to exit pairing mode, the system is ready to use.

To stop the Vibrating Pager whilst it is alerting press the reset button

#### Clear the transmitter on the Pager memory

First, press and hold the **•** button for 3 seconds to enter the pairing mode. Press the 
button to move to the zone which is to be deleted. Press and hold the ) and • buttons together for 3 seconds.

The receiver will generate a tone to indicate the transmitter on this zone has been deleted

### Change the melody in desired zone

First, press and hold the button for 3 seconds to enter the pairing mode. Press the 
button to move to the zone then press the button to select the melody required. Press the 
button until the pairing mode is exited.

### **BATTERY LOW INDICATOR**

If a zone LED light is blinking, it indicates that the battery is low for this transmitter. You must replace the battery as soon as possible. If the Pager beeps every 5 seconds, this indicates the Pager batteries are low. You must replace the batteries of the Pager